

IDS R7

HUGE PERFORMANCE,
TINY FOOTPRINT

DATA
SHEET

Remora

The IDS Remora 7 is a powerful display processor, capable of driving displays of up to 3840 x 2160 resolution. As an integrated component of IDS, it can be locked to standard time references, delivering time critical content to display devices over your IDS network.



The compact device is housed in a rugged enclosure and attaches discreetly to the rear of your display using the universal mounting bracket supplied. It connects to your network via Ethernet meaning that installation is quick and painless.

Management of the unit is straightforward, using IDS Core or via a USB keyboard plugged in directly.

Applications

Attach the IDS R7 to any display device (such as a flat-screen monitor, projector or multi-viewer). It features silent passive cooling and powerful graphics processing, making it perfect for driving DP/HDMI/DVI displays in noise-sensitive environments.

Any number of units can be installed on your system.


What is IDS?

IDS. The super cool intuitive and revolutionary workflow information solution. Originally designed as a simple clock and tally system for broadcasters, IDS harvests information from across wide area networks, aggregating it using a simple toolset, providing facilities with the power to display only the information you want, the way you want it. Boundless flexibility that lets you into a world of simple integration giving you access and total control of essential equipment at a touch by using an IDS touchscreen.

IDS is the cutting edge media technology solution and can be scaled to suit any installation, whether Industrial, Service, Broadcast, AV, Education, Defence, Medical or Corporate. Simplifying the complicated, putting the user in charge. IDS already brings ground breaking solutions to a prestigious set of customers around the globe.

Key Features

- Stand-alone USB setup
- Assignable network configuration
- 1000Mb Ethernet
- Very low power consumption
- Compact, rugged construction
- Vesa mount supplied
- 1 year warranty

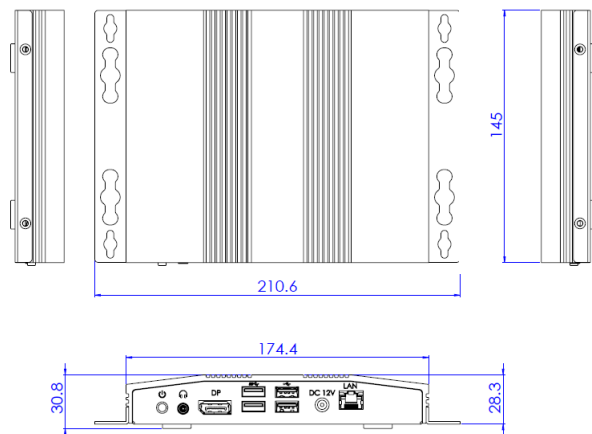

Key Benefits

- Displays dual HD 1080p video streams
- Uses standard NTP to synchronise your networked display
- Silent operation

Technical specifications

- Construction: Aluminium case
- Dimensions: L174.4x W145 x H28.3mm
- Weight: TBD
- Connectors: 4 x USB, DP, 1 x 1000Mb Ethernet, 12v DC, Audio lin.
- Communications: 1000Mb Ethernet
- Video: UHD 4K
- Power supply: 12v DC
- Power consumption: 20W typical, 25W peak
- Operating temperature: 0°C to +40°C
- Approvals: FCC, CE